



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : A61F 13/15	A1	(11) International Publication Number: WO 91/07155 (43) International Publication Date: 30 May 1991 (30.05.91)
<p>(21) International Application Number: PCT/SE90/00744</p> <p>(22) International Filing Date: 16 November 1990 (16.11.90)</p> <p>(30) Priority data: 8903868-1 17 November 1989 (17.11.89) SE</p> <p>(71) Applicant (for all designated States except US): MÖLN- LYCKE AB [SE/SE]; S-405 03 Göteborg (SE).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): RUNEMAN, Bo [SE/ SE]; Jons Väg 6, S-433 75 Partille (SE). RÖNNBERG, Peter [SE/SE]; Glasbergsgatan 76, S-431 34 Mölndal (SE).</p> <p>(74) Agents: KIERKEGAARD, Lars-Olov et al.; H. Albiñns Patentbyrå AB, Box 3137, S-103 62 Stockholm (SE).</p>		<p>(81) Designated States: AT (European patent), AU, BE (Euro- pean patent), CA, CH (European patent), DE (Euro- pean patent), DK (European patent), ES (European pa- tent), FI, FR (European patent), GB (European patent), GR (European patent), HU, IT (European patent), JP, LU (European patent), NL (European patent), NO, SE (European patent), US.</p> <p>Published <i>With international search report.</i> <i>In English translation (filed in Swedish).</i></p>
<p>(54) Title: INCONTINENCE GUARD FOR MEN</p> <div data-bbox="695 1087 1169 1684"> </div> <p>(57) Abstract</p> <p>The invention relates to a male incontinence guard intended for one-time use only and including an inner, liquid permeable casing layer (2), which is intended to lie closest to the body of the wearer in use, an outer liquid impermeable casing layer (3) and an absorbent pad (4) enclosed between the layers. According to the invention, a first part of the absorbent pad (4) intended to surround the user's scrotum, at least completely or partially, when the guard is in use, narrows towards the scrotum end (10) of the absorbent pad, i.e. towards the free end of the aforesaid first part of the pad; in that at least one elastic device (9) is attached in a prestretched state to the inner casing layer (2) and extends from the scrotum end (10) along each of the side edges (5a, 5b) of the pad over at least a part of the lengths of the side edges; and in that contraction of the elastic device or elastic devices form the prestretched state causes the first part of the absorbent body to take a curved shape so that, when the guard is used, the aforementioned part will be curved inwardly beneath the scrotum of the wearer.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FI	Finland	ML	Mali
AU	Australia	FR	France	MN	Mongolia
BB	Barbados	GA	Gabon	MR	Mauritania
BE	Belgium	GB	United Kingdom	MW	Malawi
BF	Burkina Faso	GN	Guinea	NL	Netherlands
BG	Bulgaria	GR	Greece	NO	Norway
BJ	Benin	HU	Hungary	PL	Poland
BR	Brazil	IT	Italy	RO	Romania
CA	Canada	JP	Japan	SD	Sudan
CF	Central African Republic	KP	Democratic People's Republic of Korea	SE	Sweden
CG	Congo	KR	Republic of Korea	SN	Senegal
CH	Switzerland	LI	Liechtenstein	SU	Soviet Union
CI	Côte d'Ivoire	LK	Sri Lanka	TD	Chad
CM	Cameroon	LU	Luxembourg	TG	Togo
DE	Germany	MC	Monaco	US	United States of America
DK	Denmark	MG	Madagascar		
ES	Spain				

INCONTINENCE GUARD FOR MEN

The present invention relates to a male incontinence guard intended for one-time use only and including an
5 inner, liquid-permeable casing layer which is intended to lie closest to the wearer's body in use, an outer, liquid-impermeable casing layer, and an absorbent body or pad located between said casing layers.

10 Incontinence guards used hitherto have normally consisted of conventional diapers of substantially flat configuration, for instance of rectangular shape. Diapers, however, are intended to absorb both urine and faeces and are therefore not appropriate for use by persons
15 who solely require a urine-collecting incontinence guard. The diaper must have a given width and absorbent material a given thickness in order to achieve satisfactory absorbency. Consequently, the diaper will occur, a correspondingly large space between the thighs
20 of the wearer, so as to cause discomfort, such as chafing for instance. Furthermore, there is a serious risk that urine will leak at the edges of the diaper when the diaper becomes saturated and is compressed between the wearer's thighs.

25 Large, bulky diapers are unacceptable to males who suffer from incontinence but who are otherwise not handicapped. In addition to being uncomfortable when worn, large, bulky diapers are not readily accommodated
30 in conventional clothing.

Mild incontinence is a hidden handicap suffered by many people. A large group of such people is comprised of males with prostate trouble. Subsequent to under-
35 going prostate surgery, these men are normally troubled

by drop-incontinence, which hitherto has resulted in
psysic suffering, since no suitable guard is available.

5 Incontinence guards intended for men afflicted with
mild incontinence are known per se. When worn, one such
known guard has the form of a cone-shaped container
which embraces the genital organs of the male wearer.
One drawback with this known guard is that it is much
too warm and fits much too tightly when worn, and is
10 therewith uncomfortable to the wearer. A further draw-
back is that the guard is much too inflexible for
comfort.

15 The Swedish Patent Specification No. SE 450 811 teaches
a male incontinence guard which comprises an upper
shield-like part which lies over the penis and scrotum
of the wearer in use, and a lower part which, in use,
curves inwardly beneath the penis and scrotum of the
wearer without completely enclosing the same. The guard
20 has a downwardly narrowing and basin-like configura-
tion. This guard thus avoids tightly enclosing the
organs of the wearer, which is naturally beneficial
from the aspect of comfort.

25 The guard is formed from a flat blank, one end part of
which comprises two flaps whose mutually adjacent edge
lines depart from a common point on the guard.

30 The basin-like configuration is obtained by bringing
the flaps to a position in which the edge lines overlap
one another, and then joining the flaps in this region.

One drawback with an incontinence guard of this design
resides in the complicated manufacturing procedures
35 required by the different clipping and joining steps.

5 The present invention provides an incontinence guard ,
for males who suffer mild drop-incontinence, with which
the drawbacks of the aforesaid incontinence guards are
not found.

10 An inventive incontinence guard is characterized in
that at least a first part of the absorbent pad in-
tended to embrace, completely or partially, the
wearer's scrotum in use, narrows towards the scrotum
end of the absorbent pad, i.e. towards the free end of
said first part of the absorbent pad; in that at least
one elastic device is attached, in a prestretched
state, to the inner casing layer and extends from the
15 scrotum end along each of the side edges of the absor-
bent pad over at least a part of their length; and in
that contraction of the elastic device or devices from
its or their prestretched state imparts to the first
part of the absorbent body a curved shape such that
20 said part will be curved inwardly beneath the wearer's
scrotum when the guard is worn.

25 This results in a compliable incontinence guard which
can be worn comfortably. Due to the effect of the
elastic devices, the guard will conform more readily to
the wearer's genitals than the known guards. Absorbent
sanitary products, such as male incontinence guards,
must not fit too tightly, feel uncomfortable and be too
confining, these requirements being far from unessen-
30 tial. For psychological reasons, the guard should not
even be thought to be tightly confining and unpleasant
by the presumptive user.

35 As a result of its construction, an inventive incon-
tinence guard is both simple to manufacture and easy to

handle by the user. Triangular absorption pads can be manufactured rationally from a continuous web of absorbent material, without material waste and complicated folding steps.

5

The invention will now be described in more detail with reference to an exemplifying embodiment thereof illustrated in the accompanying drawings, in which Figure 1 illustrates one embodiment of an inventive guard and shows the guard extended with the side intended to lie against the wearer in use facing the viewer, and Figure 2 is a perspective view of the guard illustrated in Figure 1, and shows the elastication in its active state.

15

The incontinence guard 1 illustrated in Figures 1-2 comprises a liquid permeable layer 2, a liquid impermeable layer 3, and an absorbent pad 4 enclosed between the two layers 2 and 3. The pad 4 may comprise an absorbent fibre material, for instance fluff. If desired, the fluff can be admixed with other absorbent material, for instance so-called superabsorbent polymers, by which is meant polymers that are capable of absorbing liquid in quantities corresponding to many times the natural weight of the polymers. Other substances of a non-absorbent nature can be admixed in the absorbent pad, for instance melt fibres.

20

25

The absorbent pad may comprise either one absorbent layer or several absorbent layers, where the various layers may also comprise mutually different absorbent material. The absorbent pad 4 may have the shape of an isosceles triangle, with two edges 5a and 5b of mutually equal length and a third, shorter edge 5c.

35

The liquid permeable layer 2 is suitably made of non-woven material. Another conceivable material is perforated plastic. The liquid-impermeable layer 3 may
5 comprise a polyethylene or polypropylene plastic, or some other liquid impervious plastic. Another conceivable material is hydrophobized non-woven material. The outer layers 2 and 3 will preferably have the same thickness and shape, and both will project slightly beyond the edges 5a, 5b, 5c of the absorbent pad, such
10 as to form side flaps 6a, 6b, 6c along which the layers 2 and 3 are mutually joined with the aid of a binder, for instance melt glue. The equally long edges 5a, 5b of the pad are therewith corresponded by side flaps 6a, 6b of mutually equal length, while the third edge 5c of
15 the absorbent pad is corresponded by a third side flap 6c. The liquid impervious material in the casing 3 is preferably permeable to air and vapours.

Prestretched elastic devices 9 are attached in the side
20 flaps 6a, 6b of mutually equal lengths. The elastic devices 9 may, for instance, have the form of elastic threads, bands or the like. The use of elastic foam material is also conceivable. The elastic devices are preferably glued to one or to both of the outer layers
25 2, 3. The elastic devices may be placed at any desired distance from the edges 5a, 5b, and the side flaps 6a, 6b, 6c can have any desired size.

Figure 1 illustrates the incontinence guard in an
30 extended or outwardly stretched form, i.e. with the elastic devices in a prestretched state, whereas Figure 2 illustrates the guard in the form in which it is used, i.e. with the elastic devices in a contracted state. Shortening of the elastic devices by contraction
35 is permitted by curving of the absorbent pad 4. The

local resistance of the pad to bending about axes parallel with the edge 5c decreases towards the end 10, and consequently the pad 4 will bend or curve more pronouncedly in the region nearest the end 10 than in parts more distal therefrom. As will be seen from Figure 2, the elastic devices 9 generate a curved, container-like part 7 which is intended to embrace the scrotum of the wearer in use, either completely or partially. Due to bending or curvature of the absorbent pad, pleating of the casing materials caused by the elastic devices will cause the side flaps 6a, 6b to be upstanding in relation to the absorbent pad.

The elastic devices may be prestressed to the same or different degree within different parts of the side flaps 6a, 6b. Naturally, different degrees of elastic pretensioning can be considered, depending on the curvature desired and also on the desired size of the incontinence guard.

According to one preferred embodiment of the invention, the elastic devices are attached in the side flaps 6a, 6b in spaced relationship with the edges 5a, 5b of the absorbent pad. As a result of this arrangement, the elastic devices 9 lift-up the side flaps 6a, 6b so as to form leakage-preventing barriers. Furthermore, the side flaps can be utilized in a simple and practical fashion when putting on the guard. When putting on the guard, the guard is first twisted so as to curve in the opposite direction to that intended when the guard is worn, whereafter the guard is gripped with the fingers of one hand in the region of the pointed end 10, in one region of the side flaps 6a, 6b between the elastic devices 9 and the edges 5a, 5b of the absorbent pad, whereafter the guard is then twisted into position over

the wearer's genitals, with the aid of the elastica-
tion.

5 Although not preferred, the elastic devices may alter-
natively be placed over the absorbent pad 4. In this
case, the side flaps 6a, 6b are not raised by the
elastic devices to form barriers and contraction of the
elastic devices is permitted by pleating of the liquid
permeable casing layer.

10

The invention shall not be considered to be limited to
the aforescribed exemplifying embodiments, since
several modifications can be made within the scope of
the following Claims. For instance, the elastic devices
15 9 can be mutually joined at the end 10 and may consist
of one single elastic thread.

20

Furthermore, the absorbent pad, similar to the incon-
tinence guard, may have a narrowing form at least in
that part which is intended to surround the scrotum. It
will also be understood that triangles having rounded
corners and triangles having non-linear edges are also
conceivable. In order to enable the article to be
gripped more readily when putting on the article, the
25 absorbent pad may advantageously be provided with
rounded recesses. This arrangement also results in
higher sealing barriers, since the distance between the
edge of the side flap and the edge of the absorbent pad
increases when such recesses are provided.

30

It will also be understood that some form of absorbent
material can also be included in the side flaps. In
order to achieve a good elastic seal and enable the
article to be twisted readily when putting on the
35 article, the material used in the side flaps must be

more flexible and bendable than the material used in the absorbent pad.

5 In one variant of the inventive article, it is conceivable to provide said article with cross-elastication, so that the absorbent pad will also bend around longitudinally extending axes.

10 Also conceivable is the use of casing material which will contract and is elastic subsequent to being heated, and to heat this elastication locally instead of using elastic threads and the like which must be held constantly stretched during manufacture of the guard.

Claims

1. A male incontinence guard intended for one-time use only and including an inner, liquid permeable casing layer (2), which is intended to lie closest to the body of the wearer in use, an outer liquid impermeable casing layer (3) and an absorbent pad (4) enclosed between said layers, c h a r a c t e r i z e d in that at least a first part of the absorbent pad (4) intended to surround the user's scrotum, at least completely or partially, when the guard is in use, narrows towards the scrotum end (10) of the absorbent pad, i.e. towards the free end of the aforesaid first part of said pad; in that at least one elastic device (9) is attached in a prestretched state to the inner casing layer (2) and extends from the scrotum end (10) along each of the side edges (5a, 5b) of said pad over at least a part of the lengths of said side edges; and in that contraction of the elastic device or elastic devices from said prestretched state causes said first part of the absorbent body to take a curved shape so that, when the guard is used, said part will be curved inwardly beneath the scrotum of the wearer.
2. A guard according to Claim 1, c h a r a c - t e r i z e d in that the casing layers (2, 3) extend somewhat beyond the side edges (5a, 5b) of the absorbent pad; and in that the elastic device or elastic devices (9) is/are attached between the parts of the casing layers which extend beyond said side edges.

1/2

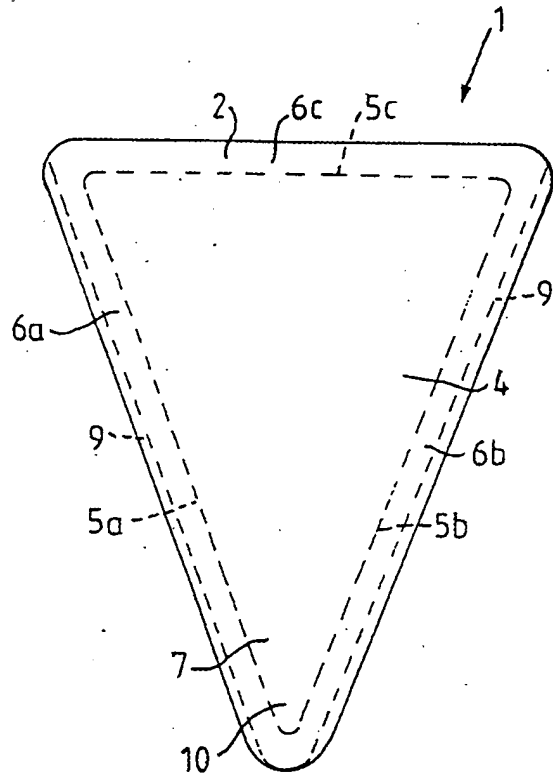


FIG.1

2/2

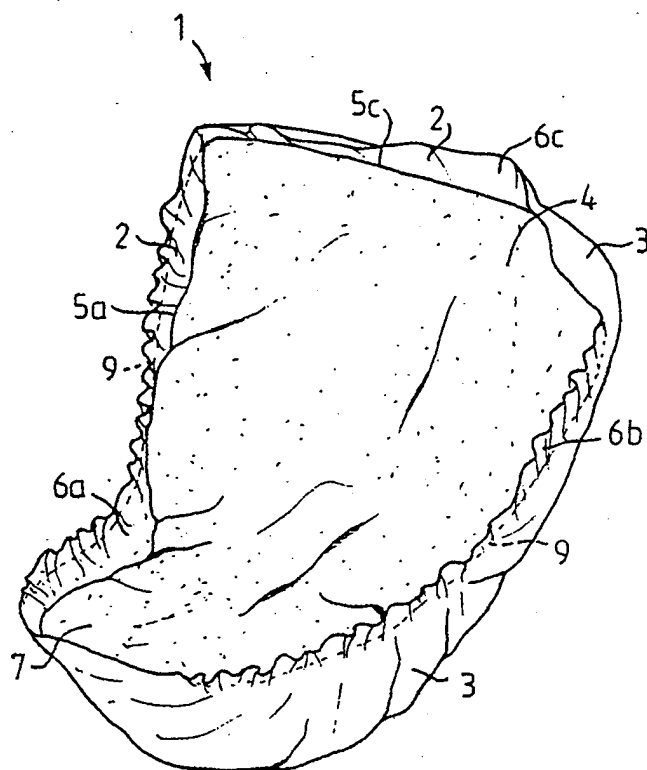


FIG. 2

INTERNATIONAL SEARCH REPORT

International Application No PCT/SE 90/00744

I. CLASSIFICATION OF SUBJECT MATTER (If several classification symbols apply, indicate all) ⁶ According to International Patent Classification (IPC) or to both National Classification and IPC IPC5: A 61 F 13/15						
II. FIELDS SEARCHED <div style="text-align: center; border-top: 1px solid black; border-bottom: 1px solid black;">Minimum Documentation Searched⁷</div> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 25%; border-bottom: 1px solid black;">Classification System</td> <td style="border-bottom: 1px solid black;">Classification Symbols</td> </tr> <tr> <td style="height: 40px; vertical-align: bottom;">IPC5</td> <td style="vertical-align: bottom;">A 61 F</td> </tr> </table> <div style="text-align: center; border-top: 1px solid black; border-bottom: 1px solid black;">Documentation Searched other than Minimum Documentation to the extent that such Documents are included in Fields Searched⁸</div>			Classification System	Classification Symbols	IPC5	A 61 F
Classification System	Classification Symbols					
IPC5	A 61 F					
SE,DK,FI,NO classes as above						
III. DOCUMENTS CONSIDERED TO BE RELEVANT						
Category *	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³				
Y	WO, A1, 8605386 (THE SECRETARY OF STATE FOR SOCIAL SERVICES) 25 September 1986, see page 3, line 21 - line 24 --	1				
Y	SE, B, 406035 (MO OCH DOMSJÖ AB) 22 January 1979, see the whole document --	1				
Y	EP, A2, 0167931 (KIMBERLY-CLARK CORPORATION) 15 January 1986, see page 9, line 5 - line 10 --	1-2				
Y	CH, A5, 666612 (BOUSSAC SAINT-FRERES B.S.F.) 15 August 1988, see the whole document -- -----	1-2				
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>* Special categories of cited documents: ¹⁰</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 45%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance, the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance, the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p> </div> </div>						
IV. CERTIFICATION						
Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report					
14th February 1991	1991 -02- 20					
International Searching Authority	Signature of Authorized Officer					
SWEDISH PATENT OFFICE <small>Form PCT/ISA/210 (second sheet) (January 1985)</small>	 Ingrid Falk					

**ANNEX TO THE INTERNATIONAL SEARCH REPORT
ON INTERNATIONAL PATENT APPLICATION NO.PCT/SE 90/00744**

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report.
The members are as contained in the Swedish Patent Office EDP file on **90-12-28**
The Swedish Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A1- 8605386	86-09-25	AU-B- 587438	89-08-17
		AU-D- 5542586	86-10-13
		EP-A-B- 0215833	87-04-01
		GB-A-B- 2183448	87-06-10
		US-A- 4898594	90-02-06
SE-B- 406035	79-01-22	EP-A- 0007936	80-02-20
		GB-A-B- 2035804	80-06-25
		JP-A- 54010596	79-01-26
		WO-A- 79/00008	79-01-11
EP-A2- 0167931	86-01-15	AU-D- 4444885	86-01-16
		CA-A- 1247304	88-12-27
		JP-A- 61092668	86-05-10
		US-A- 4668230	87-05-26
CH-A5- 666612	88-08-15	BE-A- 903587	86-05-05
		FR-A-B- 2572649	86-05-09
		GB-A- 2182840	87-05-28

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.